

■ KIP-611PG

■ KIP-605PG



## [ KIP-611PG / KIP-605PG ]


- 5 Ch multiple interphone : KIP-605PG
- 11 Ch multiple interphone : KIP-611PG
- Single or multiple connection
- All master intercom system
- Paging function
- Gentle electronic sound
- Easy wiring & installation (mount on the wall or desk)
- Outdoor panel, DS-4M connection

### Specifications

Model no.	KIP-605PG	KIP-611PG	DS-4M
Power	DC24V / 1.2A (powered form comm on power supply)		
Power consumption	Max. 1.7W, Stand by : 0.85W		
Assurance temperature	0°C ~ +50°C		
Wiring	4wires		
Max. wiring distance	∅ 0.65 single cable : 1Km		
Mount type	Surface mount		
Dimension (mm)	92(W) x 210(H) x 57(D)	95(W) x 127(H) x 32(D)	
Weight (Approx. kg)	0.5kgs (1 p.c)		

• The product may include option or additional functions.

### Wiring Network

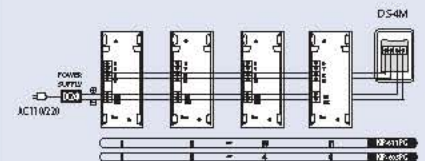

#### [ Power Supply ]

- PS-M1
- Input : AC 100V~127V or 220V~240V
- Output : DC 24V / 1.2A



#### [ Outdoor Panel ]

- DS-4M